SAMSUNG

Wireless Audio - Multiroom M7

| Quick Setup Guide |

WAM750 / WAM751

AH68-02665A-03

Understanding Your M7

Wireless Audio 를 어떻게 사용 할까요?

Android   iOS

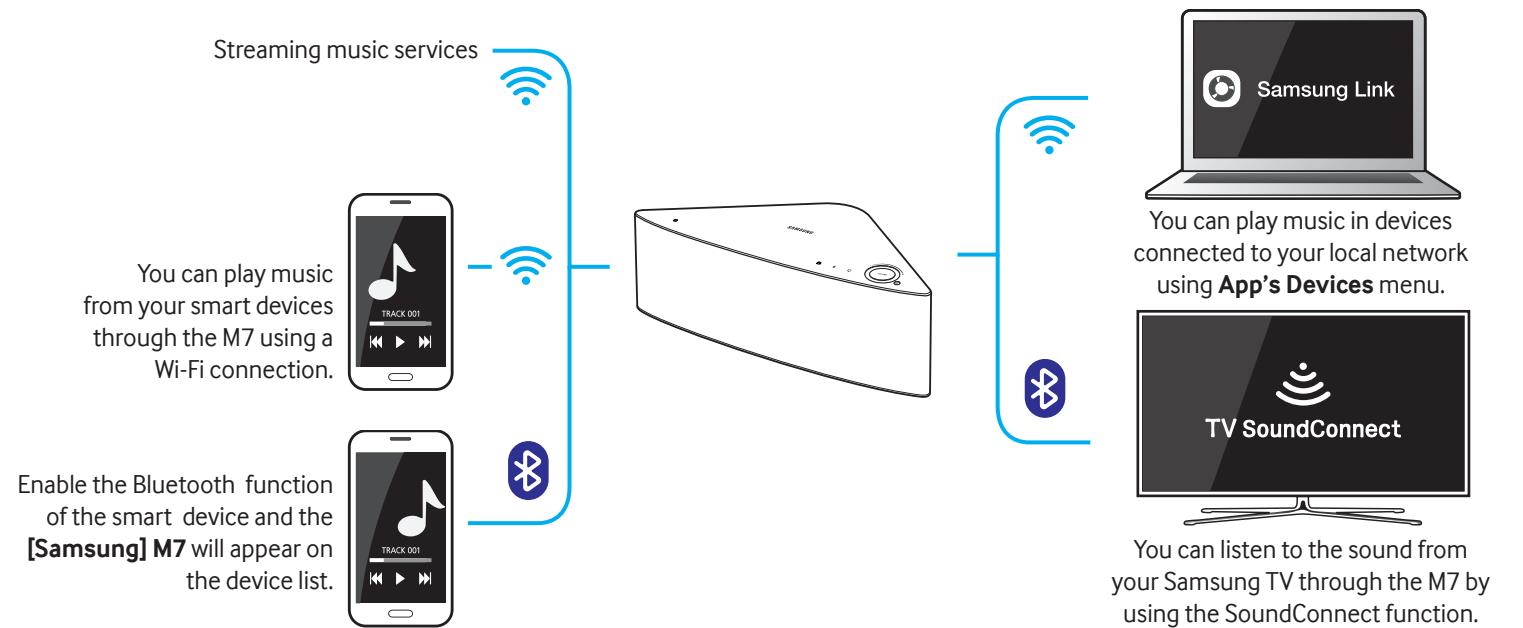QR code   QR code
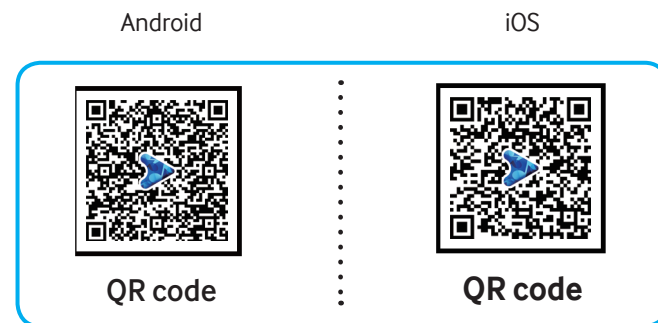
더 자세한 설명은 Web 매뉴얼을 이용하세요.

- Web manual : www.Samsung.com ➡ Support ➡
  Product name search : WAM750/WAM751 ➡ PDF file download.

How you can enjoy your M7

- Stream music through Internet radio, music services, or from the cloud.
- Play music through a Wi-Fi connection from your smart device.
- Play music from your phone, PC, or smart devices via Bluetooth.
- Use the TV SoundConnect function to play sound from your Samsung TV.
- If you have connected a HUB, you can configure multiple M7s in a Multi-room set-up with Internet radio, music services, and Samsung Link.
  - Note that Bluetooth and TV SoundConnect are not configured for Multi-room set-ups.

Streaming music services

You can play music from your smart devices through the M7 using a Wi-Fi connection.

Enable the Bluetooth function of the smart device and the **[Samsung] M7** will appear on the device list.

TRACK 001

Samsung Link

You can play music in devices connected to your local network using **App's Devices** menu.

TV SoundConnect

You can listen to the sound from your Samsung TV through the M7 by using the SoundConnect function.

Accessories

Confirm you have the supplied accessories shown below.

Wireless Audio-Multiroom M7

Power cord
(WAM750 : 3903-000910
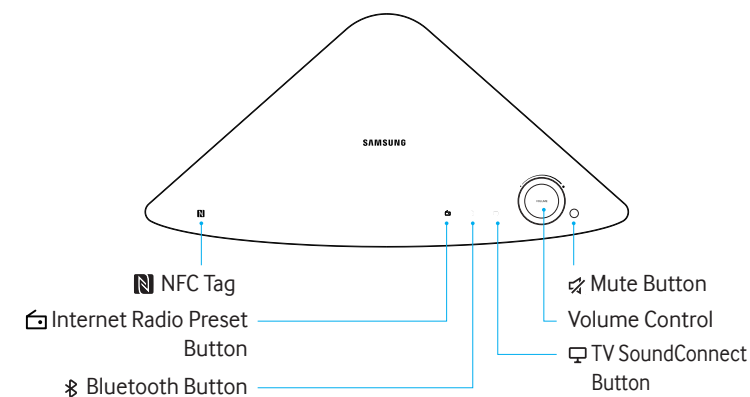WAM751 : 3903-000911)

Cover-Stand
(WAM750 : AH96-02695A
WAM751 : AH96-02695B)

Toroidal ferrite core
(3301-000144)

Quick Setup Guide
(AH68-02665A)

Getting Started
(AH68-02665D)

Before you begin

- Communication Basics

Internet   Wireless Router   Smart Device: Android or iOS (App Control)

1. Requirements: Wireless Router, Smart Device
2. The wireless router should be connected to the Internet.
3. The smart device should be connected to the router via a Wi-Fi connection.

Top Panel

NFC Tag
Internet Radio Preset Button
Bluetooth Button

Mute Button
Volume Control
TV SoundConnect Button

- When you turn on the M7, touch buttons appear on its top panel.
- Press and hold the ✗ **Mute** button for more than 5 seconds to place the M7 into Sleep Mode.
- Press and hold the ⬜ **TV SoundConnect** button for more than 5 seconds to reset TV SoundConnect and connect a new TV.
- You can listen to radio stations by pressing the ⬜ **Internet Radio Preset** button on the top panel of the M7. Each time you press the button, the M7 changes the station.
- Enable your smart device's Bluetooth by touching it to the ⬜ **NFC Tag** on the top panel of the M7. (Android only)

Rear Panel

SPK ADD button
WPS/Wi-Fi SETUP button
AUX IN
SERVICE
ETHERNET
POWER
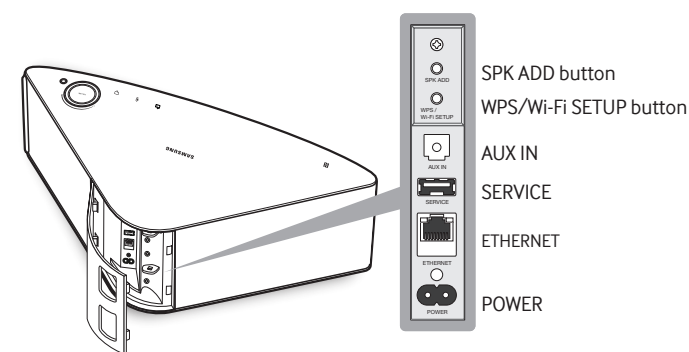
- **SPK ADD** Button: Press for 1 second to pair your M7 with a HUB.
- **WPS/Wi-Fi SETUP** Button:
  - Press for 1 second to connect the M7 to your wireless router using WPS.
  - Press and hold down for more than 5 seconds until you hear a fast, 3 note beep to connect the M7 to your network through your smart device using the Wi-Fi Setup method.

Connecting the Power Cable

Rear Cover open

Insert the power cable through the rear cover hole into the M7 power port.
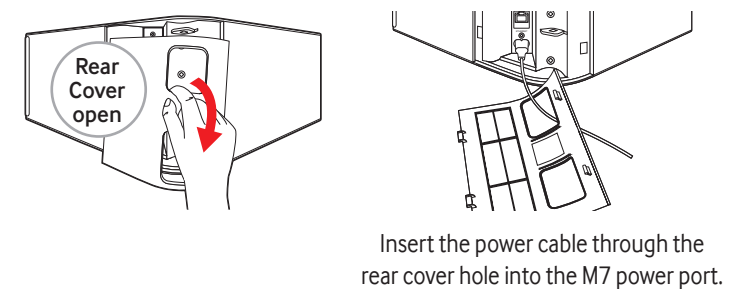
- When completing network setup, close the rear cover.

Looping the power cable around the toroidal ferrite core
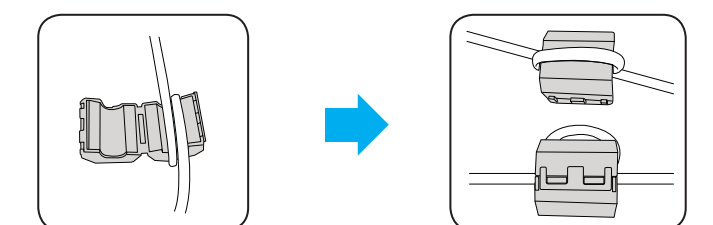
- It is better to attach Toroidal ferrite cores at each end of the cable, one close to the wall plug and another close to the terminal where it connects to the M7.

Install
▦ Step 1

- **Case 1: With a HUB (Pairing the M7(s) to a HUB.)**

  HUB / M7 / LAN / Wireless Router / HUB / Plug In / HUB / HUB / A / HUB / Plug In

  - You can connect the LAN cable to any **ETHERNET SWITCH** port of the HUB
  - The LED indicator (A) flashes. If it does not flash, press the **SPK ADD** button on the HUB's rear panel for 1 second.

- **Case 2: Without a HUB (Connecting the M7 to your router using the WPS Method.)**

  The method used to establish a WPS connection depends on the wireless router being used. WPS connection may not be supported by your router. Check the user manual of the wireless router.

  M7 / Plug In / **WPS button** / Wireless Router / **WPS/Wi-Fi SETUP button** / 1 Second

  The shape of the **WPS** button or icon that denotes, it may look different depending on the manufacturer.

  - ■ If connection is not made within about two minutes of pressing the WPS button, try again by pressing the WPS buttons on your wireless router and speaker.
  - ■ If you don't have HUB or cannot find the **WPS** button on the wireless router, try to establish a wired connection or proceed with Wi-Fi setup after referring to the web manual or to the M7 App Guide.

- **Case 2-1 : WPS 버튼이없는 라우터 연결하기**

  App을 실행 ➔ I don't have a Hub ➔ WPS/Wi-Fi SETUP ➔ App 설명에 따라 단계를 진행 해주세요
  (더 자세한 설명은 WiFi Guide를 확인하거나, web 매뉴얼을 참조하세요.)

- **Case 3 : Connecting the M7 to Your Network with a LAN Cable (For a Single M7)**

  ETHERNET / M7 back / Wireless Router / Plug In

▦ Step 2

- **Pairing/Connecting is OK**

  Please wait a few minutes until the M7's LED indicator stops flashing. (Since the beeping is generated during the pairing process, wait a moment until a melody is heard.)

  BEEP ➔ **OK** ➔ **MELODY**

  – Pairing is complete when the M7's LED indicator stops flashing and turns solid blue, and you hear a melody. Go to STEP 3.

- ⚠ **Pairing/Connecting has failed.**

  BEEP ➔ **NG**

  – If the M7's LED indicator turns red, it means pairing/connecting has failed.
  1. Press the **SPK ADD** button on the **rear of the HUB**. The HUB's LED indicator ( ) flashes.
  2. Press the **SPK ADD** button on the **rear of the M7**. The M7 beeps and the M7's LED indicator flashes to indicate that the M7 has switched to pairing mode. Wait until the M7's LED indicator turns solid blue.

▦ Step 3

To use the M7, download and then install the Samsung Multiroom App by tagging the NFC/QR code below or by accessing the app through Google play or the App Store.

- **Android**

  NFC / **Tag here** / **QR code** / Market search : Samsung Multiroom / ANDROID APP ON Google play

  - ■ Do not attach the NFC sticker on a metallic surface.
  - ■ Metallic object may interfere with communication and the NFC sticker may not work properly.

- **iOS**

  QR code / Market search : Samsung Multiroom / Available on the App Store

Accessing the Samsung Multiroom App

SAMSUNG

Control the M7 with your Smart Device and the Samsung Multiroom App.
After you download the Multiroom app, installation and set-up runs automatically.
After installing the app, pop-up screen appears.
Select **App Tutorial**, and then follow the directions on your smart device's screen.

Appendix - Adding a New M7 or HUB

- **Add an M7 after performing "Case 1" procedures**

  M7 / **NEW** / HUB back / HUB / SPK / A / Plug In / Go to Step 2 above.

- **Add an M7 and a HUB after performing "Case 2" procedures**

  NEW / M7 / NEW HUB / 1 LAN / 2 POWER / Plug In / M7 back / SPK / WPS / Wi-Fi SETUP / ORIGINAL / Go to Step 2 above.

- **Connecting the Cover-Stand**

  Remove the M7's rear cover before inserting the Cover-Stand into the M7. Insert the power cable into the Cover-Stand.

  Insert the Cover-Stand into slot A of the M7.

  With the Cover-Stand inserted into slot A insert the other side into slot B. Then, press the area indicated by the arrow with force.

- **Removing the Cover-Stand**

  Apply force in the direction of the arrow while pushing the cover-stand's handle outwards.